



# Potency of *Botryococcus braunii* cultivated on palm oil mill effluent (POME) wastewater as the source of biofuel

Muhamad Maulana Azimatun Nur<sup>1,2†</sup>, Tutik Muji Setyoningrum<sup>2</sup>, I Gusti Suinarcana Budiaman<sup>2</sup>

<sup>1</sup>Department of Chemical Engineering, Faculty of Industrial Technology, Universitas Pembangunan Nasional "Veteran" Yogyakarta, Jl. SWK 104, Condongcatur, Sleman, Yogyakarta 55281, Indonesia

<sup>2</sup>Department of Ocean Ecosystems, Energy and Sustainability Research Institute Groningen, University of Groningen, Nijenborgh 7, 9747 AG Groningen, The Netherlands

## Abstract

Indonesia is known as the largest oil palm producer in the world. However, along with the production, it generates wastes and pollution that caused the environmental problem in surrounding areas. Previous researchers reported that the high palm oil mill effluent (POME) concentration inhibited microalgae growth. However, the inhibition factor was not clearly explained by using kinetic model. This study presents kinetic models of *Botryococcus braunii* (*B. Braunii*) cultivated on POME wastewater under different turbidity condition. Results showed that the growth model of Zwietering was closely suitable with experimental results. It was found that *B. braunii* was able to consume organic carbon from the POME wastewater on the logarithmic model. A modified kinetic model of Monod Haldane described the influence of turbidity and COD on the cultivation. Turbidity of POME medium inhibited the growth rate at KI 3.578 and KII 179.472 NTU, respectively. The Lipid (39.9%), and carbohydrate (41.03%) were found in the biomass that could be utilized as biofuel source.

**Keywords:** Biofuel, *Botryococcus braunii*, Kinetic model, Palm oil mill effluent, Turbidity



This is an Open Access article distributed under the terms of the Creative Commons Attribution Non-Commercial License (<http://creativecommons.org/licenses/by-nc/3.0/>)

which permits unrestricted non-commercial use, distribution, and reproduction in any medium, provided the original work is properly cited.

Received May 1, 2017 Accepted June 18, 2017

<sup>†</sup> Corresponding Author

E-mail: m.m.azimatun.nur@rug.nl

Tel: +62-274-486733 Fax: +62-274-486733

## 1. Introduction

Food agricultural organization statistical database (FAOSTAT) from United Nation reported that South East Asia coconut palm oil (CPO) production shares 88.6% of total world production. Within this region, Indonesia is known as the largest producer, followed by Malaysia and Thailand [1]. From 2010 to 2014, the production increased with 30.14% [2]. In 2014, Indonesia CPO production was about 22.500.000 metric ton [3]. However, along with the production, it generates wastes and pollution that caused the environmental problem in surrounding areas. Palm oil mill effluent (POME) is a wastewater generated from CPO processing. It contains high nutrients, total suspended solid (TSS), and total dissolved solid (TDS). It is reported that the production of a ton of CPO will generate about 2.5-3.0 m<sup>3</sup> of POME [4]. Releasing untreated POME directly to the surroundings will cause serious pollution problems in the environment due to high chemical oxygen demand (COD) and biological oxygen demand (BOD) content. In a traditional industry, POME is treated by conventional facultative anaerobic-aerobic open ponds to reduce the COD and BOD content. It requires a large area, and the release of the greenhouse gasses may harm the environment. Generally, high COD loading and low pH of the palm oil mill effluent, together with the colloidal nature of the total suspended solids, render treatments by conventional methods difficult [5].

Recently, there have been many discussions on the progress of wastewater reuse globally to protect the environment and achieve sustainable resources, as well as food, fuel, and feed products [6-10]. Microalgae could be a promising agent to lower agro-industrial wastewater due to the capability to utilize nutrient for the growth [6, 7]. Several researchers reported the potential of POME as promoting media for microalgae growth [8, 9]. Moreover, the wastewater

can provide the mixotrophic mode for microalgae medium due to the content of organic carbon [11].

The biomass of *Botryococcus braunii* is a potential source for biofuel due to the capability to produce a high amount of hydrocarbon and could be converted into several chemical products [12] Based on our knowledge, the cultivation of *B. braunii* on POME wastewater was not well explored. Kamyab et al. [13] reported that the high POME concentration inhibited microalgae growth. However, the inhibition factor was not clearly explained by using the kinetic models.

Previous researchers reported the kinetic study of microalgae cultivated on wastewater to produce biofuel source. Silva et al. [14] evaluated the kinetics of biomass production and nutrient removal by two microalgal species cultivated on synthetic wastewater by using pseudo-first-order kinetic model. While Gani et al. [15] predicted the growth of *Botryococcus* sp and the nutrient uptake on domestic wastewater by using Logistic model. However, both kinetic models are not proposed to predict the growth of algae on wastewater contained high turbidity. Focus of this research was to study the influence of turbidity on the kinetic model of *B. braunii* cultivated on the different POME concentration and comparing both of the kinetic models. Focus of this research was to study the influence of turbidity on the kinetic model of *B. braunii* cultivated on different digested POME concentration.

## **2. Materials and Methods**

### **2.1. Wastewater Preparation**

The POME was collected from a anaerobic ponding system of traditional palm oil mill industry in Lampung, Sumatra. POME was pretreated by heating at 80<sup>0</sup>C atmospheric pressure to prevent bacteria contamination. The preparation was followed by using 400 mesh filter cloth to decrease

the suspended solid. The initial COD of digested POME was 1,200 mg/L, 400 mg/L N-total, 280 mg/L ammonia, P as  $\text{PO}_4^-$  20 mg/L, TSS 250 mg/L, and pH 8.5.

## 2.2. Cultivation Condition and Measurement

*B. braunii* strain was purchased from central institute of brackish water aquaculture BBPBAP Jepara, Central Java. *B. braunii* was inoculated in a modified Chu 13 medium [16], which  $\text{KNO}_3$  was replaced with urea, and  $\text{KH}_2\text{PO}_4$  was replaced by triple super phosphate. For experimental data, digested POME wastewater was diluted with double distilled water at different ratio 0-50% v/v. Control as modified Chu 13 was added with 1 g/L  $\text{NaHCO}_3$  as an inorganic carbon source to compare the autotrophic and mixotrophic condition of algae cultivated on POME. Cultivation was carried out in 2 L Erlenmeyer flask with working volume 80% volume and gently mixed with aerator at 0.5 vvm containing sterile air. Fluorescent lamp was employed as the source of light at 5000 lux intensity. Temperature, salinity, and pH were set at 28°C, 0.15 M NaCl, and 6.8 - 7.2, respectively.

$$\text{Dry biomass (X, g/L)} = (\text{OD}_{680} - 0.0495) / 1.0089 \quad [17] \quad (1)$$

The cultivation was measured daily by using spectrophotometer optima SP-300 to obtain optical density at 680 nm wavelength ( $\text{OD}_{680}$ ) of the cell. The wavelength has advantage to facilitate the prediction of the biomass at low concentration in wastewater and cloudy water as reported by Alvares-Diaz et al. [17] Myers et al. [18]. The initial media without the addition of microalgae cells was used as a blank. Dry biomass (X, g/L) was recorded by plotting the results of OD to Eq. (1) [17]. Specific growth rate was calculated from Eq. (2) [8].

$$\mu = \frac{\ln(OD_t) - \ln(OD_0)}{t_t - t_0} \quad [8] \quad (2)$$

where  $OD_t$  (unitless) is the optical density of the cell at the end of exponential time ( $t_t$ , day),  $OD_0$  (unitless) is the optical density of the cell at the beginning of cultivation time ( $t_0$ , day). COD was measured using SNI protocol No. 06-6989.22-2004 [19], each day for 6 days.

### 2.3. Modeling Method

To investigate the growth kinetics of *B. braunii*, models were investigated by measuring the growth rate, the substrate consumption rate, and the effect of substrate on the growth rate. Parameters of these models were predicted by using Minitab 16.0 software. The growth result of *B. braunii* cultivated on different POME concentration was employed to validate the models.

#### *B. braunii* growth model

Many growth kinetic models such logistic, Gompertz, Schnute, Baranyi-Roberts, and Monod are available for predicting the growth of microalgae. The logistic model by Bailey and Ollis [20] was widely applied for the cell growth. It uses the simple calculation to study the microbial growth due to independent of substrate consumption [21]. The model provides the specific growth, the initial cell concentration, and the maximum cell concentration as

$$X_t = \frac{X_0 \cdot e^{\mu \cdot t}}{1 - \left(\frac{X_0}{X_s} \cdot (1 - e^{\mu \cdot t})\right)} \quad (3)$$

where  $X_t$  (g/L) is the concentration of *B. braunii* cell at any time  $t$  (d),  $\mu$  (d<sup>-1</sup>) is specific growth rate,  $X_0$  (g/L) is the concentration of the cell at the beginning of cultivation, and  $X_s$  (g/L) is the maximum concentration of the cell.

Zwietering model was employed for the cultivation of algae and bacteria on the wastewater medium [22-25]. Zwietering model provides the lag phase time, specific growth, initial cell concentration, and maximum cell concentration. It was modified from Gompertz [25] as

$$X_t = X_s \cdot \exp \left\{ - \exp \left[ \frac{\mu \cdot e}{X_s} (\lambda - t) + 1 \right] \right\} \quad (4)$$

where  $X_t$  (g/L) is the concentration of the cell at any time  $t$  (d),  $\mu$  (d<sup>-1</sup>) is specific growth rate,  $X_s$  (g/L) is the maximum concentration of the cell, and  $\lambda$  is lag time (days).

Monod kinetic model was employed to evaluate the growth related to the substrate consumption. Monod [26] equation is the well-known model to describe the relation of the growth with the substrate utilization.

In order to evaluate the growth rate related to the turbidity, the model was described as

$$\mu = f(S) \cdot (I) \quad (5)$$

The growth rate ( $\mu$ ) was influenced by a substrate (S) and intensity (I) [27-29]. The modified model was proposed as

$$\mu = \frac{\mu_{\max} \cdot S}{K_s + S + \left( \frac{S^2}{K_i} \right)} \cdot \frac{K \cdot I}{K_l + I + \frac{I^2}{K_{II}}} \quad (6)$$

where  $I$  (lux) is light intensity,  $K_I$  and  $K_{II}$  are saturation and inhibition constant (lux), and  $K$  is constant. The light intensity was substituted by the turbidity by using modified Beer Lambert law in Eq. (7) and Eq. (8) [30].

$$\log\left(\frac{I_{in}}{I_{out}}\right) = k \cdot X_0 \cdot Z_{max} \quad (7)$$

$$I_{out} = I_{in} \exp\left[(-k \cdot X_0) + K_{bg}\right] Z_{max} \quad (8)$$

where  $I_{out}$  is outgoing light (lux),  $I_{in}$  is incoming light (lux),  $X_0$  is initial cell concentration of the algae,  $k$  is specific light constant,  $K_{bg}$  is turbidity (NTU), and  $Z_{max}$  is mixing depth. At the beginning of the cultivation,  $X_0$  was low, and  $Z_{max}$  was set to constant, thus Eq. (8) was simplified to Eq. (9).

$$I_{out} = I_{in} \exp^{K_{bg}} \quad (9)$$

Since  $I_{out}$  is equivalent to  $K_{bg}$ , the increasing of turbidity  $K_{bg}$  will lower the incoming light intensity ( $1/ I_{in}$ ). The correlation between Initial turbidity  $K_{bg}$  and total suspended solid TSS (mg/L) was calculated from Eq. (10) [31]

$$K_{bg} = 0.4833(TSS)^{1.012} \quad (10)$$

Thus, Eq. (6) was modified as

$$\mu = \frac{\mu_{max} \cdot S}{K_s + S + \left(\frac{S^2}{K_i}\right)} \cdot \frac{K \cdot K_{bg}}{K_I + K_{bg} + \frac{K_{bg}^2}{K_{II}}} \quad (11)$$

### *substrate consumption rate*

Several substrate consumption kinetic models are available such Monod, zero order, first order, logarithmic, and logistic model [32] In this research, the first order (Eq. (13)) and the logarithmic kinetic model (Eq. (14)) were evaluated and compared to the substrate consumption rate in integral mode.

$$S = S_0 \exp(-k.t) \quad (12)$$

$$S = S_0 + X_0 [1 - \exp(k.t)] \quad (13)$$

where  $S$  (mg/L) is the substrate calculated from the COD of POME at any time ( $t$ , d),  $S_0$  is the initial substrate concentration (mg/L), and  $k$  is the constant rate ( $d^{-1}$ ).

## **2.4. Component Analysis**

The lipid and carbohydrate content were evaluated by performing microwave-assisted extraction and acid hydrolysis. One hundred miligram of dry biomass sample was placed in a modified microwave equipped with a three neck flask and condenser. Modified Folch method was employed for the lipid extraction by using chloroform and methanol as co-solvent [33]. The sample was then extracted by using microwave irradiance at 30% power (max output 900 W, 2,450 Mhz) for 5 min. The sample was extracted again by a conventional heating at 60°C and gently mixed for 30 min at 100 rpm. It was cooled and centrifuged at 1,000 rpm for 20 min to separate residue, chloroform, lipid, and methanol. At the center of layers, chloroform containing the lipid was gently pipetted out. And the chloroform was evaporated until the lipid reached a constant weight.

Acid hydrolysis was employed for carbohydrate analysis. The suspension of dried algae in water (0.1 g/10 mL or 10% w/v) was mixed at 100 rpm stirrer bar to homogenize the suspension. The liquid of H<sub>2</sub>SO<sub>4</sub> 1.1% v/v was added to the sample as the catalyst. The mixture was processed in 70% power (equal to 630 W) with frequency 2,450 Mhz and output 900 W for 8 min. Phenol-sulfuric acid by Dubois et al. [34] was employed to analyze the total carbohydrate.

In order to analyze the lipid profile, GC/MS was employed. The lipid was converted into fatty acid methyl ester (FAME) as described by Martinez-Guerra et al. [35]. Further analysis was employed by using GC/MS (QP-2010 Shimadzu, Japan) equipped with silica capillary column (30 m × 0.25 mm, 25 μm) and run at the flow rate of 1 mL/min. Helium was used as the carrier. The FAME was diluted with pure n- hexane before injected into the column. The protocol by Sahu et al. [36] was followed by next step.

## 2.5. Statistical Analysis

Minitab 16.0. (USA) was employed to predict parameters. Levenberg-Marquardt algorithm was used to minimize the sums of the square and residuals between the predicted and the experimental results with the confidence level for regression coefficient  $R^2 > 95\%$ .

$$\text{Sum of error (\%)} = \frac{\text{experiment} - \text{predicted}}{\text{experiment}} \times 100\% \quad (14)$$

The sum of error (SE, %) in Eq. (14) was performed to evaluate the error of predicted and experimental results.

Coefficient of determination ( $r^2$ ) and index of agreement (d-index) were estimated to evaluate the performance of the models and the agreement of the values. The  $r^2$  and d-index value were ranged between 0 and 1. The closer value to 1 means perfect model performance and perfect agreement between observed and predicted value [37, 38].

### 3. Results and Discussion

#### 3.1. Cell Growth on POME Medium

Fig. 1 describes the growth profiles of *B. braunii* cultivated on various media. It indicated that the control containing modified Chu 13 was the most suitable media for *B. braunii*. When *B. braunii* was cultivated on POME, the growth rate was lower. The highest Napierian logarithm ( $\ln X/X_0$ ) was recorded for the control, followed by 5, 3, 7, 10, 30 and 50% POME concentration. In this result, the optimum growth of *B. braunii* supplemented with POME was recorded at 5% v/v concentration. This condition was in line with Hadiyanto and Azimatun Nur [39] and Kamyab et al. [13] who cultivated microalgae in media containing different POME concentration.

It is reported that POME influenced growth due to the condition that generated the mixotrophic cultivation condition and provided organic carbon. However, POME also contains high turbidity that inhibits light penetration and acts as auto-inhibitor. According to Budiman et al., the use of undiluted POME as a substrate inhibited the growth of phototrophs, such as *Rhodospira rubra*, due to the decrease of light penetration into the fermentation system [40]. In our result, the concentration of POME more than 50% v/v gave a negative result for the growth (data was not shown). The concentration of 10 to 50% v/v POME was employed for further investigation.

### 3.2. Cell Growth Kinetic

Fig. 2 shows the kinetic growth of *B. braunii* on different media. The Zwietering and the logistic kinetic model were suitable for the growth ( $R^2 > 95\%$ ) (Table 1). The most suitable kinetic model for the growth was found on the Zwietering model with high average  $r^2$  of predicted and observed value. In Addition, the average of d-value on Zwietering model was also higher, indicating that the model gave better agreement value compared to Logistic model (Table 2 and 3). In the model, the value of lag phase time was included. By this condition, the Zwietering model was more suitable for ideal cultivation condition that consists of lag, log, and stationary phase. It is proved that the lag phase time is important during the acclimatization of algae on wastewater medium and should be included on the model.

However, when the high POME was added (400 mg/L), both of the models gave poor  $r^2$  and d-value. It seems that other disturbances were influenced on the growth such as turbidity content that could inhibit the growth, resulting inaccuracy of the models.

### 3.3. COD Consumption Rate

Fig. 3 and Table 2 show the COD consumption rate of *B. braunii* under different initial substrates. At the first day of the cultivation, the highest COD consumption rate was found in the initial COD 130 mg/L, which decreased up to 47.84 mg/L in 6 days. While at 250 and 400 mg/L, *B. braunii* was able to decrease the content up to 155 and 282.93 mg/L, respectively.

The highest reduction of COD value was also found at the initial COD 130 mg/L. While the addition of POME decreased the COD efficiencies (Table 4). This is due to the effect of POME that acts as auto-inhibition substrate. In addition, the higher POME concentration generates cultivation mode from mixotrophic to slightly heterotrophic condition [11]. When the light was

not provided in media, microalgae start consuming organic carbon as the source of energy in the heterotrophic condition. While in the mixotrophic condition, light and organic carbon can act as the dual energy source for algae, which is found on 130 and 250 mg/L COD of POME.

### **3.4. Substrate Consumption Kinetic Model**

The logarithmic and the first-order kinetic model were performed for the substrate consumption rate profile (Fig. 3). In Table 2, high sum of error was found in the first order kinetic model. Simkins and Alexander [31] reported that the first order kinetic model was not suitable to predict the growth of microorganism that consumes high initial COD substrate. While the logarithmic kinetic model was suitable to predict in all ranges of initial substrates because of the initial biomass value is included into the equation. For the logarithmic kinetic rate, it is recorded at 0.451, 0.320, and 0.216 d<sup>-1</sup> for 130, 250, and 400 mg/L of the COD, respectively. In our result, the highest COD efficiency was recorded from 130 mg/L.

### **3.5. COD Substrate – Growth Rate Kinetic Model**

Table 3 shows the result of parameters predicted by the Monod-Haldane and the modified Monod Haldane kinetic model. Both kinetic models gave regression value  $R^2 > 95\%$ . For Monod-Haldane model, the sum of error was 10.88%, while modified Monod-Haldane was 6.01%.

The simulation of the models was shown in Fig. 4. The Monod Haldane model provides an explanation that the substrate can act as an inhibitor. For modified Monod Haldane kinetic model,

the turbidity value as the function of light intensity was included in the equation. For experimental results, the highest growth rate ( $0.165 \text{ d}^{-1}$ ) was recorded at 75 mg/L COD. According to Fig. 4(b), the highest growth rate was  $0.165 \text{ d}^{-1}$  at 50 NTU and 75 mg/L COD. While from Fig. 4(a), the model gave the highest growth rate at  $0.161 \text{ d}^{-1}$  when 75 mg/L substrate was added.

Table 7 shows the estimation of  $R^2$  and d-value of the models. The result explained that the  $R^2$  of the modified Monod-Haldane model gave better performance. In addition, the d-value was higher compared to Monod-Haldane model that described better results for the growth rate kinetic model under different POME concentration due to the turbidity value that was included in the model. It indicated that the COD was not only the inhibitor parameter for *B. braunii* growth, but also the turbidity content can act as inhibitor due to the low penetration of the light. In this model, the turbidity acts as inhibitor at  $K_I$  3.578 and  $K_{II}$  179.472 NTU, respectively. While on modified Monod-Haldane model, the COD content inhibited the growth at  $K_i$  332.840 mg/L, which is higher compared to Monod-Haldane model. Kamyab et al [13] found that the growth of *Chlamydomonas* was quite slow when 500 mg/L and 1,000 mg/L COD of the POME was used as the substrate.

### **3.6. Lipid and Carbohydrate Content of *B. braunii***

For Table 4, the highest lipid (39.9%), and carbohydrate (41.03%) were recorded from 250 mg/L COD POME, while the biomass content from the control medium resulted higher lipid (62.3%) and carbohydrate (24.2%). It is stated that a higher temperature absorbed inside the cell than the surrounding water influenced a fatigue effect experienced by the algal cell walls. The higher

differences of the temperature between inside and outside the cell, that was resulted from fast repeating frequency (2.45 GHz), makes the walls more easily destroyed [41]. Previous research also reported that microwave irradiation on the hydrolysis of the algal biomass gave shorter time compared to conventional hydrolysis [42].

However, the biomass content was lower compared to previous research. Compared to another mixotrophic cultivation, the biomass of *B. braunii* was high in the presence of molasses as stated by Yeesang and Cheirsilp [43]. It seems that the presence of ammonium in the POME medium inhibited the growth of the *B. braunii*. This result was in agreement with Ruangsomboon [44] found that the addition of ammonium both in the form of urea and ammonium bicarbonate gave lower biomass production to *B. braunii* compared to nitrate. In addition, the high turbidity in the POME medium might also influenced the biomass production and the growth rate as explained above.

In this research, the carbohydrate productivity of *B. braunii* was slightly higher than lipid productivity. This result was in agreement with Ashokumar and Rengasamy [45] who reported the high carbohydrate productivity of *B. braunii* cultivated on modified Chu medium in open raceways system. In our research, the cultivation was carried out on 30°C. The optimal temperature of *B. braunii* is 25°C. It seems that the supraoptimal temperature inhibited the synthesis of intracellular lipids, and the algae tend to accumulate more carbohydrate as stock of energy [45]. However, the carbohydrate was also higher compared to control medium that was cultivated under autotrophic condition.

From GC/MS analysis, C16, C23, and C18 were found for fatty acid with the composition at 4.25, 37.29, and 2.10%, respectively. The rich composition of hydrocarbon was consist of hexacosane (C<sub>26</sub>H<sub>54</sub>) at 23.25%, n Dotriacontane (C<sub>32</sub>H<sub>66</sub>) at 6.08%, botryococcene (C<sub>34</sub>H<sub>58</sub>) at

5.74%, and n-eicosane ( $C_{20}H_{42}$ ) at 4.90%. According to the analysis, it was not suitable for biodiesel source. However, high hydrocarbon composition is still promising for another fuel. Kitazato et al. [46] stated that the crude hydrocarbons of *B. braunii* can be converted to gasoline (60% to 70%), light cycle oil (10% to 15%), heavy cycle oil (2% to 8%), and coke (5% to 10%) by subjecting the crude oil to catalytic cracking. The lipid that extracted in the solvent can be burnt directly [12]. The high amount of carbohydrate from the biomass was also potential for other product such bioethanol and sugar fatty acid surfactant.

#### **4. Conclusions**

*B. brauni* was successfully cultivated on the low POME concentration. The Zwietering model was suitable to describe the growth. Lower initial COD substrate (130 mg/L), resulted higher consumption rate ( $0.451\text{ d}^{-1}$ ) and efficiency (63%). The logarithmic kinetic model was suitable to predict the consumption rate of COD by *B. braunii*. The modified Monod Haldane model was also suitable to predict the optimum condition of the growth rate on the different POME concentration that influenced by turbidity ( $K_I$  3.578 and  $K_{II}$  179.472 NTU) and COD ( $K_I$  332.840 mg/L). The Lipid (39.9%), and carbohydrate (41.03%) were found in the biomass that could be utilized as biofuel source.

#### **Acknowledgments**

The authors are pleased to acknowledge the LPPM Universitas Pembangunan Nasional (UPN) “Veteran” Yogyakarta for financial support in Research Cluster Project with contract number 2241/UN62/XI/2015. M.M. Azimatun Nur is pleased to acknowledge Indonesia Endowment

Fund for Education (LPDP) for the support. The authors are also pleased to thank Yudha P.B. and R. Harvianto who assisting the cultivation experiment.

## References

1. FAOSTAT. Crops processed database [Internet]. Food and Agriculture Organization of the United Nations; c2016 [cited 19 October 2016]. Available from <http://www.fao.org/faostat/en/#data/QD/visualize>.
2. BPS. Indonesian oil palm statistics. Jakarta: BPS Statistics Indonesia; 2015.
3. Otieno NE, Dai XP, De Barba D, et al. Palm oil production in malaysia: an analytical systems model for balancing economic prosperity, forest conservation and social welfare. *Agr. Sci.* 2016;7:55-69.
4. Saidu M, Yuzir A, Salim MR, Salmiati, Azman S, Abdullah N. Influence of palm oil mill effluent as inoculum on anaerobic digestion of cattle manure for biogas production. *Bioresour. Technol.* 2013;141:174-176.
5. Shak KPY, Wu TY. Optimized use of alum together with unmodified *Cassia obtusifolia* seed gum as a coagulant aid in treatment of palm oil mill effluent under natural pH of wastewater. *Ind. Crops Prod.* 2015;76:1169-1178.
6. Abdel-Raouf N, Al-Homaidan AA, Ibraheem IBM. Microalgae and wastewater treatment. *Saudi J. Biol. Sci.* 2012;19:257-275.
7. Delrue F, Alvarez-Diaz PD, Fon-Sing S, Fleury G, Sassi J-F. The environmental biorefinery: Using microalgae to remediate wastewater, a win-win paradigm. *Energies* 2016;132:1-19.

8. Resdi R, Jeng Shiun L, Hesam K, et al. Review of microalgae growth in palm oil mill effluent for lipid production. *Clean Technol. Environ. Policy* 2016;18:2347-2361.
9. Wai YC, Tau Chuan L, Pau LS, Joon CJ, Jo-Shu C, Duu-Jong L. Cultivation in wastewaters for energy: A microalgae platform. *Appl. Energ.* 2016;179:609-625.
10. Wu TY, Mohammad AW, Lim SL, Lim PN, Hay JXW. Recent advances in the reuse of wastewaters for promoting sustainable development. In: Sharma SK, Sanghi R, eds. *Wastewater reuse and management*. Netherlands: Springer; 2013. p. 47-103.
11. Azimatun Nur MM, Hadiyanto H. Enhancement of *Chlorella vulgaris* biomass cultivated in POME medium as biofuel feedstock under mixotrophic conditions. *J. Eng. Technol. Sci.* 2015;47:487-497.
12. Banerjee A, Sharma R, Chisti Y, Banerjee A. *Botryococcus braunii*: A renewable source of hydrocarbons and other chemicals. *Crit. Rev. Biotechnol.* 2002;22:245-279.
13. Kamyab H, Din MFM, Keyvanfar A, et al. Efficiency of microalgae chlamydomonas on the removal of pollutants from palm oil mill effluent (POME). *Energy Procedia* 2015;75:2400-2408.
14. Silva NFP, Gonçalves AL, Moreira FC, et al. Towards sustainable microalgal biomass production by phycoremediation of a synthetic wastewater: A kinetic study. *Algal Res.* 2015;11:350-358.
15. Gani P, Sunar NM, Hazel M-P, Jamaian SS, Latiff AAA. Effects of different culture conditions on the phycoremediation efficiency of domestic wastewater. *J. Enviro. Chem. Eng.* 2016;4:4744-4753.
16. Yamaguchi K, Nakano H, Murakami M, et al. Lipid composition of a green alga, *Botryococcus braunii*. *Agr. Biol. Chem.* 1987;51:493-498.

17. Alvarez-Diaz PD, Ruiz J, Arbib Z, Barragan J, Garrido-Perez C, Perales JA. Factorial analysis of biokinetic growth parameters and CO<sub>2</sub> fixation rate *Chlorella vulgaris* and *Botryococcus braunii* in wastewater and synthetic medium. *Desalin. Water Treat.* 2014;52:4904-4914.
18. Myers JA, Curtis BS, Curtis WR. Improving accuracy of cell and chromophore concentration measurements using optical density. *BMC Biophys.* 2013;6:1-15.
19. SNI. Air dan air limbah - Bagian 22: Cara uji nilai permanganat secara titrimetri. 06-6989.22-2004. [cited 19 October 2016]. Available from: [http://sisni.bsn.go.id/index.php?/sni\\_main/sni/detail\\_sni/7001](http://sisni.bsn.go.id/index.php?/sni_main/sni/detail_sni/7001).
20. Bailley JF, Ollis DF. Biochemical Engineering Fundamentals. 2nd ed. Chennai: Tata McGraw Hill Publishers; 1986. p. 408-440.
21. Surendhiran D, Vijay M, Sivaprakash B, Surajunnisa A. Kinetic modeling of microalgal growth and lipid synthetic for biodiesel production. *3 Biotech.* 2015;5:663-669.
22. Zwietering MH, Jongenburger I, Rombouts FM, Riet K VAN'T. Modelling of the bacterial curve. *J. Appl. Environ. Microbiol.* 1990;56:1875-1881.
23. Kayombo S, Mbwette TSA, Katima JHY, Jorgensen SE. Effects of substrate concentrations on the growth of heterotrophic bacteria and algae in secondary facultative ponds. *Water Res.* 2003;37:2937-2943.
24. Bougaran G, Rouxel C, Dubois N, et al. Enhancement of neutral lipid productivity in the microalgae *Isochrysis affinis galbana* (T-Iso) by a mutation-selection procedure. *Biotechnol. Bioeng.* 2012;109:2737-2745.


25. Gompertz B. On the nature of the function expressive of the law of human mortality, and on a new mode of determining the value of life contingencies. *Philos. T. Roy. Soc. London* 1825;115:513-585.
26. Monod J. The growth of bacterial cultures. *Annu. Rev. Microbiol.* 1949;3:371-393.
27. Zhang XW, Zhang YM, Chen F. Kinetic models for phycocyanin production by high cell density mixotrophic culture of the microalga *Spirulina platensis*. *J. Ind. Microbiol. Biotechnol.* 1998;21:283-288.
28. Chojnacka K, Noworyta A. Evaluation of *Spirulina* sp. growth in photoautotrophic, heterotrophic and mixotrophic cultures. *Enzyme Microb. Technol.* 2004;34:461-465.
29. Mirzaie MAA, Kalbasi M, Ghobadian B, Mousavi SM. Kinetic modeling of mixotrophic growth of *Chlorella vulgaris* as a new feedstock for biolubricant. *J. Appl. Phycol.* 2016;28:2707-2717.
30. Thornton A, Weinhart T, Bokhove O, et al. Modeling and optimization of algae growth [Internet]. CASA Report 10-59. [cited 08 September 2016]. Available from: [www.doc.utwente.nl/75743/1/SecondSubmittedVersion.pdf](http://www.doc.utwente.nl/75743/1/SecondSubmittedVersion.pdf).
31. Holliday CP, Rasmussen TC, Miller WP. Establishing the relationship between turbidity and total suspended sediment concentration. In: Proceedings of the 2003 Georgia Water Resources Conference, April 23-24 2003; University of Georgia: Athens, GA, USA.
32. Simkins S, Alexander M. Models for mineralization kinetics with the variables of substrate concentration and population density. *Appl. Environ. Microbiol.* 1984;47:1299-1306.
33. Teo CL, Idris A. Enhancing the various solvent extraction method via microwave irradiation for extraction of lipids from marine microalgae in biodiesel production. *Bioresour. Technol.* 2014;171:477-481.

34. Dubois M, Gilles KA, Hamilton JK, Rebers PA, Smith F. Colorimetric method for determination of sugar and related substances. *Anal. Chem.* 1956;28:350-356.
35. Martinez-Guerra E, Veera Gnaneswar G, Andro M, William H, Rafael H. Extractive-transesterification of algal lipids under microwave irradiation with hexane as solvent. *Bioresour. Technol.* 2014;156:240-247.
36. Sahu A, Imran P, Deepti J, et al. Fatty acids as biomarkers of microalgae. *Phytochemistry* 2013;89:53-58.
37. Nakagawa S, Schielzeth H. A general and simple method for obtaining  $R^2$  from generalized linear mixed-effects models. *Methods Ecol. Evol.* 2013;4:133-142.
38. Willmott CJ. On the validation of models. *Phys. Geograph.* 1981;2:184-194.
39. Hadiyanto H, Azimatun Nur MM. Lipid extraction of microalgae *Chlorella* sp cultivated in palm oil mill effluent (POME) medium. *World Appl. Sci. J.* 2014;31:959-967.
40. Budiman PM, Wu TY, Ramanan RN, Hay JXW. Treatment and reuse of effluents from palm oil, pulp, and paper mills as a combined substrate by using purple nonsulfur bacteria. *Ind. Eng. Chem. Res.* 2014;53:14921-14931.
41. Avinesh RB, Adarsha G, Colin JB, Munish P. Evaluation and comparison of algal cell disruption methods: Microwave, waterbath, blender, ultrasonic and laser treatment. *Mar. Drugs* 2015;13:5111-5127.
42. Azimatun Nur MM, Dedy K, Setyoningrum TM, Budiawan IGS. Utilization of microalgae cultivated in palm oil mill wastewater to produce lipid and carbohydrate by employing microwave- assisted irradiation. *Recent Innovation Chem. Eng.* 2016;9:107-116.


43. Yeesang C, Cheirsilp B. Low-cost production of green microalga *Botryococcus braunii* biomass with high lipid content through mixotrophic and photoautotrophic cultivation. *Appl. Biochem. Biotechnol.* 2014;174:116-129.
44. Ruangsombong S. Effects of different media and nitrogen sources and levels on growth and lipid of green microalga *Botryococcus braunii* KMITL and its biodiesel properties based on fatty acid composition. *Bioresour. Technol.* 2015;191:377-384.
45. Ashokumar V, Rengasamy R. Mass culture of *Botryococcus braunii* Kutz. under open raceway pond for biofuel production. *Bioresour. Technol.* 2012;104:394-399.
46. Kitazato H, Asaoka S, Iwamoto H. Catalytic cracking of hydrocarbons from microalgae. *J. JPN. Petrol. Inst.* 1989;32:28-34.

Environmental Engineering Research

Figures and Tables

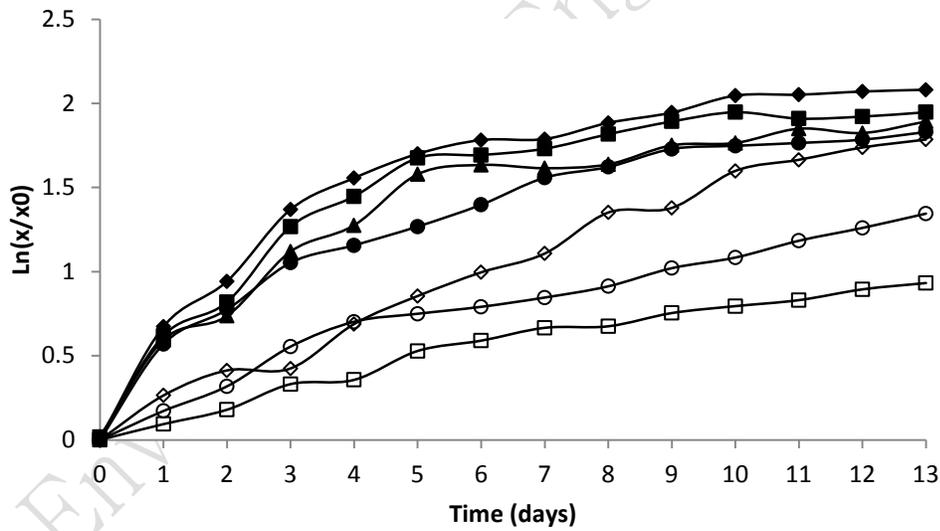

**Fig. 1.** Growth profile of *B. braunii* cultivated under different media; control (◆), 3% (▲), 5% (■), 7% (●), 10% (◇), 30% POME(○), 50% POME (□).

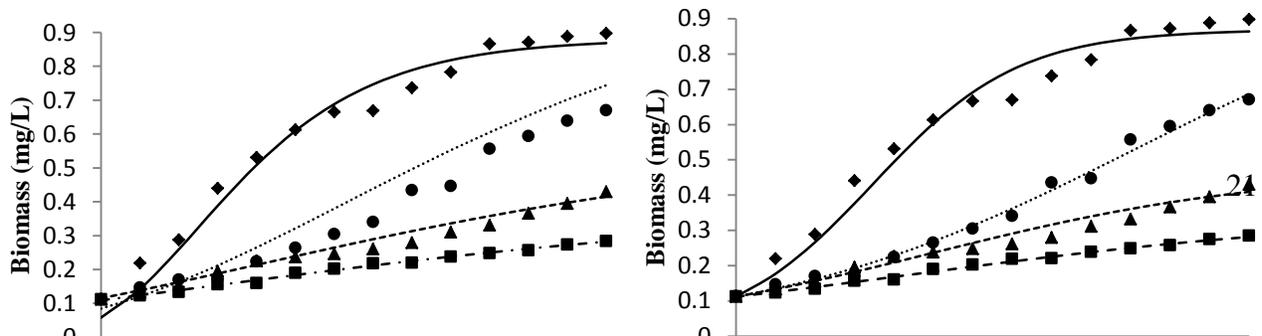


(a)


(a)

(b)

**Fig. 2.** Growth profile of (a) logistic and (b) Zwietering for the effect of different media; data experiment of control (modified Chu 13) ( $\blacklozenge$ ), 130 mg/L COD (10% POME) ( $\bullet$ ), 250 mg/L COD (20% POME) ( $\blacktriangle$ ), 400 mg/L COD (30% POME) ( $\blacksquare$ ); simulated result of control (—), 120 mg/L COD (.....) 250 mg/L COD (-----), 400 mg/L COD (-----). The biomass was obtained from Eq. (1).

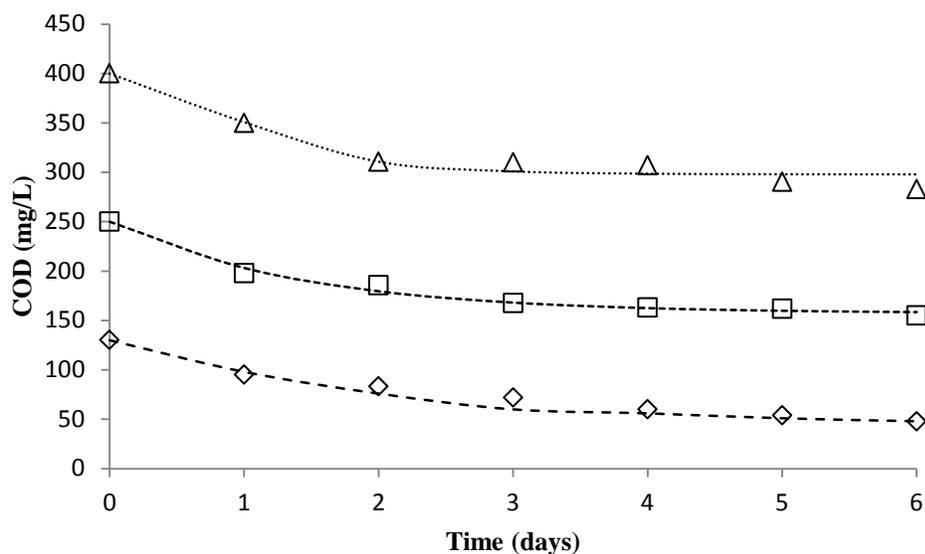

**Fig. 3.** COD consumption of *B. braunii* under different initial substrate from simulation of logarithmic model. 130 mg/L COD ( $\diamond$ ), 250 mg/L COD ( $\square$ ), 400 mg/L COD ( $\Delta$ ); simulated result of 400 mg/L (.....), 250 mg/L COD (-----), 130 mg/L COD (-----) logarithmic kinetic model.

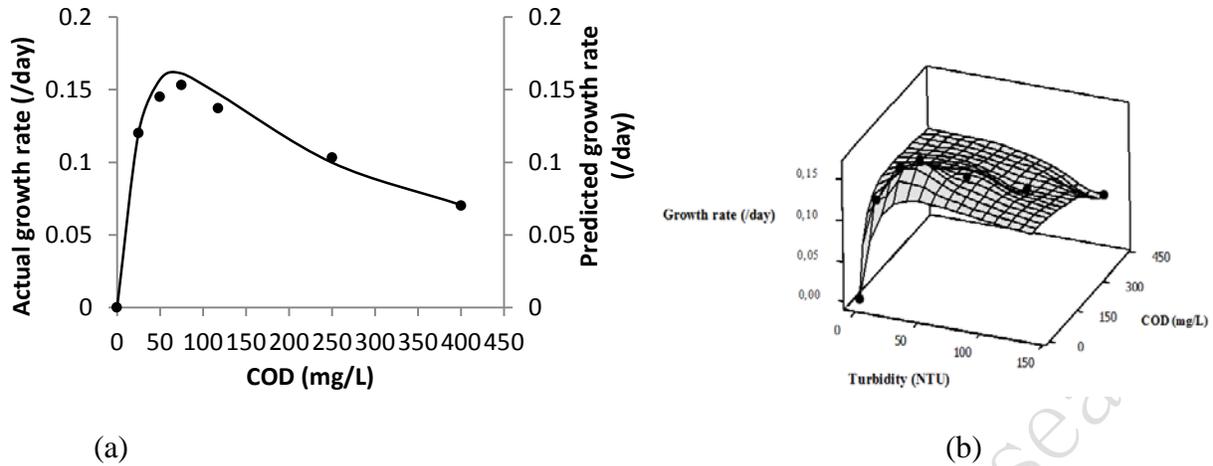

**Fig. 4.** Predicted (  $\nabla$  ) and observed (  $\bullet$  ) growth rate of (a) Monod-Haldane kinetic model (b) Modified Monod-Haldane kinetic model.

**Table 1.** Parameters for Cell Growth Models

Media	Zwietering model				Logistic model			Observed value	
	$X_s$	$\lambda$	$\mu_{max}$	$R^2$	$X_s$	$\mu_{max}$	$R^2$	$X_s$	$\mu_{max}$
Control	0.825	0	0.129	0.982	0.803	0.543	0.998	0.840	0.159
COD 130 mg/L	0.679	-3.42	0.044	0.981	0.615	0.329	0.964	0.670	0.137
COD 250 mg/L	0.528	-4.303	0.025	0.975	0.417	0.234	0.966	0.429	0.103
COD 400 mg/L	0.338	-7.194	0.012	0.974	0.292	0.127	0.973	0.284	0.071

**Table 2.** Estimated Parameter of  $R^2$  and d-index between Observed Optical Density ( $OD_e$ ) and Predicted Optical Density ( $OD_p$ ) on Logistic Model at Different Media

Control				COD 130 mg/L				COD 250 mg/L				400 mg/L			
$OD_e$	$OD_p$	$r^2$	d	$OD_e$	$OD_p$	$r^2$	d	$OD_e$	$OD_p$	$r^2$	D	$OD_e$	$OD_p$	$r^2$	d
0.113	0.058	0.991	0.949	0.113	0.084	0.991	0.927	0.112	0.115	1.000	0.967	0.112	0.109	0.999	0.907
0.220	0.142	0.974	0.891	0.147	0.120	0.990	0.913	0.133	0.138	0.998	0.927	0.133	0.124	0.981	0.562
0.288	0.259	0.994	0.935	0.170	0.162	0.999	0.968	0.154	0.163	0.994	0.830	0.144	0.139	0.991	0.631
0.441	0.388	0.947	0.629	0.172	0.211	0.973	0.795	0.195	0.188	0.992	0.730	0.165	0.154	0.000	0.000
0.531	0.508	0.957	0.171	0.224	0.264	0.952	0.630	0.226	0.214	0.928	0.000	0.176	0.169	0.000	0.000
0.613	0.610	0.764	0.000	0.265	0.321	0.848	0.000	0.237	0.239	0.996	0.506	0.197	0.184	0.000	0.000
0.686	0.688	0.998	0.903	0.305	0.380	0.489	0.000	0.265	0.265	0.997	0.000	0.207	0.198	0.000	0.000
0.700	0.747	0.871	0.205	0.364	0.438	0.000	0.000	0.291	0.289	0.000	0.000	0.231	0.212	0.586	0.000

0.737	0.789	0.910	0.499	0.414	0.496	0.000	0.000	0.309	0.313	0.000	0.298	0.259	0.225	0.658	0.000
0.784	0.818	0.970	0.780	0.457	0.552	0.000	0.000	0.311	0.336	0.568	0.000	0.211	0.238	0.559	0.000
0.867	0.839	0.984	0.889	0.557	0.605	0.889	0.584	0.331	0.358	0.792	0.000	0.231	0.250	0.611	0.000
0.872	0.853	0.994	0.930	0.595	0.655	0.892	0.672	0.366	0.378	0.982	0.687	0.246	0.262	0.599	0.000
0.888	0.862	0.989	0.913	0.640	0.701	0.928	0.773	0.395	0.397	1.000	0.957	0.255	0.272	0.600	0.000
0.898	0.868	0.987	0.908	0.671	0.744	0.921	0.793	0.430	0.415	0.991	0.838	0.260	0.282	0.864	0.000
Average	0.952	0.686				0.705	0.504			0.803	0.482			0.532	0.150

**Table 3.** Estimated Parameter of  $R^2$  and d-index between Observed Dry Weight ( $DW_o$ ) and Predicted Dry Weight ( $DW_p$ ) Calculated from Optical Density on Zwietering Model at Different Media

Control				COD 130 mg/L				COD 250 mg/L				400 mg/L			
$DW_o$	$DW_p$	$r^2$	d	$DW_o$	$DW_p$	$r^2$	d	$DW_o$	$OD_p$	$r^2$	d	$DW_o$	$DW_p$	$r^2$	d
0.113	0.112	1.000	0.947	0.113	0.113	1.000	0.955	0.112	0.112	1.000	0.990	0.112	0.112	1.000	0.966
0.220	0.177	0.988	0.913	0.147	0.147	0.998	0.953	0.133	0.133	1.000	0.980	0.133	0.125	0.987	0.878
0.288	0.266	0.996	0.959	0.170	0.170	0.999	0.985	0.154	0.157	0.999	0.961	0.144	0.139	0.993	0.915
0.441	0.376	0.842	0.881	0.172	0.172	0.992	0.906	0.195	0.182	0.973	0.960	0.165	0.157	0.900	0.765
0.531	0.494	0.730	0.888	0.224	0.224	0.999	0.876	0.226	0.209	0.865	0.898	0.176	0.168	0.904	0.781
0.613	0.603	0.191	0.587	0.265	0.265	0.999	0.753	0.237	0.237	1.000	0.967	0.197	0.183	0.000	0.262
0.686	0.692	0.994	0.984	0.305	0.305	0.993	0.405	0.265	0.264	0.986	0.976	0.207	0.196	0.000	0.000
0.700	0.756	0.673	0.843	0.364	0.364	0.999	0.019	0.291	0.291	1.000	0.955	0.211	0.212	0.581	0.000
0.737	0.799	0.788	0.865	0.414	0.414	0.987	0.089	0.309	0.316	0.961	0.950	0.219	0.225	0.662	0.000
0.784	0.826	0.944	0.921	0.457	0.457	0.937	0.524	0.311	0.340	0.441	0.807	0.231	0.238	0.563	0.000
0.867	0.843	0.992	0.942	0.557	0.557	0.951	0.842	0.331	0.361	0.745	0.846	0.241	0.251	0.616	0.000
0.872	0.854	0.996	0.962	0.595	0.595	0.994	0.854	0.366	0.379	0.979	0.941	0.256	0.262	0.601	0.000
0.888	0.860	0.990	0.950	0.640	0.640	0.999	0.880	0.395	0.396	1.000	0.989	0.265	0.272	0.598	0.000

0.898	0.864	0.987	0.945	0.671	0.671	0.996	0.880	0.430	0.409	0.983	0.948	0.270	0.281	0.859	0.000
	0.975	0.899				0.989	0.707			0.923	0.940			0.662	0.326

**Table 4.** Parameters for the Substrate Consumption Rate Models

Actual So (mg/L)	Logarithmic model				First order kinetic model			COD reduction Efficiencies (%)
	S <sub>0</sub> (mg/L)	k (d <sup>-1</sup> )	X <sub>0</sub> (mg/L)	Sum of error (%)	S <sub>0</sub> (mg/L)	k (d <sup>-1</sup> )	Sum of error (%)	
130	136.83	-0,451	82.58	0.03	129.31	-0.164	5.46	63
250	251.71	-0,320	94.48	0.01	230.35	-0.140	7.69	38
400	416.58	-0,216	98.12	0.02	348.49	-0.134	8.16	29

**Table 5.** Parameters for Substrate – Growth Rate Kinetic Model

Parameter	Monod-Haldane	Modified Monod-Haldane
$\mu_{max}$ (d <sup>-1</sup> )	0.44	0.03
$K_S$ (mg/L)	58.85	7.443
$K_i$ (mg/L)	78.22	332.840
K (constant)	-	9.519
$K_I$ (NTU)	-	3.578
$K_{II}$ (NTU)	-	179.472
R <sup>2</sup> (%)	99.73	99.96
Average Sum of error (%)	10.88	6.01

**Table 7.** Estimated Parameter of R<sup>2</sup> and d-index between Observed and Predicted Growth Rate Value on Monod Haldane and Modified Monod-Haldane Model

$\mu_{observed}$	Monod-Haldane			Modified Monod-Haldane		
	$\mu_{predicted}$	r <sup>2</sup>	d	$\mu_{predicted}$	r <sup>2</sup>	d
0	0	0.996	1	0.000	1	1

0.12	0.120	0.999	0.729	0.120	1.000	1
0.156	0.157	0.991	0.758	0.156	1.000	1
0.165	0.161	0.824	0.724	0.165	0.998	1
0.137	0.142	0.979	0.830	0.137	0.993	1
0.103	0.100	1.000	0.782	0.101	0.998	1
0.07	0.071	0.996	0.747	0.068	0.999	1

**Table 8.** Comparison of *B. braunii* Cultivated on Different Media

Medium	$X$	$L$	$C$	$P_x$	$P_L$	$P_c$	Reference
250 mg/L COD POME	0.429	39.9	41.03	44.18	17.63	18.11	This Study
Control	0.840	62.3	24.2	133	82.8	32.18	This Study
15 g/L Molasses Modified Chu 13	3.05	36.9	NA	-	-	-	[43]
Open raceways pond	1.8	19	33	114	21.66	37.62	[45]

Notes.  $X$  = dry biomass (g/L),  $L$  = lipid content (%w),  $C$  = carbohydrate content (%w),  $P_x$  = biomass productivity (mg/L/d),  $P_L$  = lipid productivity (mg/L/d),  $P_c$  = carbohydrate productivity (mg/L/d).